

Specification:

- 1) Voltage Rating: 250 V AC/DC
- 2) Current Rating: 5A AC/DC
- 3) Temperature Range: -25°C ~ +85°C
- 4) Contact Resistance: 10 mohms max.
- 5) Insulation Resistance: 1000 Mohms min.
- 6) Dielectric Withstanding Voltage: 1500 V AC/DC/Minute
- 7) Material: Nylon 66, UL94V-0

No. of
ways

A

B

2

3.96

8.04

3

7.92

12.10

4

11.88

15.96

5





15.84

20.00

6

19.80

23.90

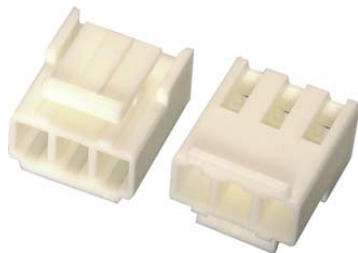

NS39-Txx

